

SPECIFICATIONS
for the
Kodak Moments M1 ORDER STATION
(CONSOLE 9)
and
Kodak Moments M1 CABINETS
Service Code: 1032C



PLEASE NOTE

The information contained herein is based on the experience and knowledge relating to the subject matter gained by Kodak Alaris prior to publication. Nothing contained herein shall be construed as conferring by implication, estoppel, or otherwise, any license under any patent, trade secret, trademark or any existing copyright, except as specified herein.

Kodak Alaris reserves the right to change this information without notice, and makes no warranty, express or implied, with respect to this information. Kodak Alaris shall not be liable for any loss or damage, including consequential or special damages, resulting from any use of this information, even if loss or damage is caused by negligence or other fault by Kodak Alaris.



This equipment includes parts and assemblies sensitive to damage from electrostatic discharge. Use caution to prevent damage during all service procedures.

Table of Contents

Description	Page
Equipment Specifications	3
Kodak Moments M1 ORDER STATION	3
Size and Weight - Packed	3
Size and Weight - Unpacked	3
BOOSTER with PRINT CATCHER for the Kodak Moments M1 ORDER STATION	4
Size and Weight - Packed	4
Size and Weight - Unpacked	4
305 PRINTER COUNTERTOP ENCLOSURE for the Kodak Moments M1 ORDER STATION	5
Size and Weight - Packed	5
Size and Weight - Unpacked	5
305 PRINT STATION CABINET for the Kodak Moments M1 ORDER STATION	6
Size and Weight - Packed	6
Size and Weight - Unpacked	6
Site Specifications	7
Power Requirements	7
Environment Requirements	7
Cable Requirements	7
Network Requirements	8
Wired Connection	8
Wireless Connection	8
4G Cellular Modem	8
Smart Phone Express Requirements	8
Upload / Download Requirements	9
Space Requirements	10
Kodak Moments M1 ORDER STATION	10
BOOSTER with PRINT CATCHER for the Kodak Moments M1 ORDER STATION	11
Behind the Counter CABINET for the Kodak Moments M1 ORDER STATION	12
CABINET for the Kodak Moments M1 ORDER STATION	13


Section 1: Equipment Specifications

Kodak Moments M1 ORDER STATION

Size and Weight - Packed

Height	Width	Depth	Weight
50.8 cm (20 in.)	50.8 cm (20 in.)	50.8 (20 in.)	19.05 kg (42 lb)

Size and Weight - Unpacked

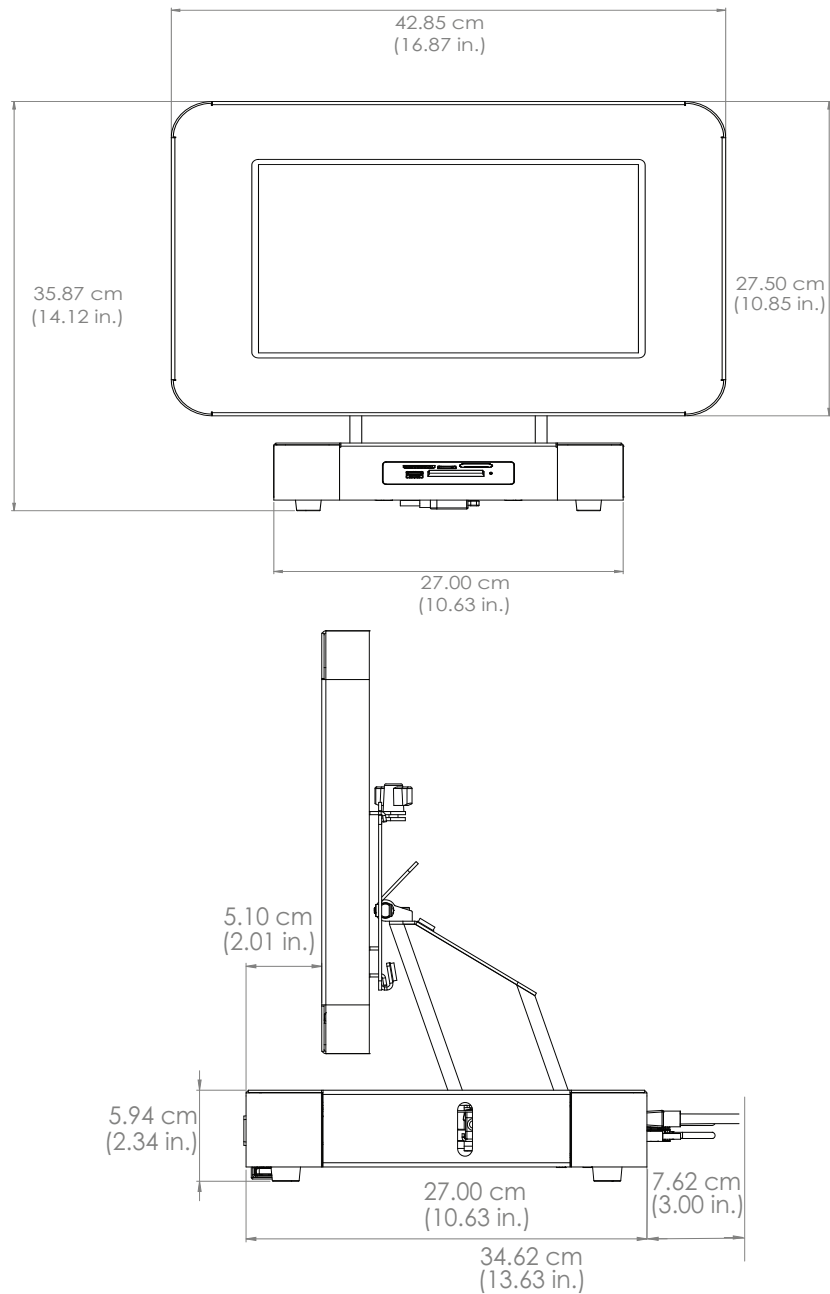


Height	Width	Depth	Depth (with CABLES)	Weight
35.87 cm (14.12 in.)	42.85 cm (16.87 in.)	27.00 cm (10.63 in.)	34.62 cm (13.63 in.)	10.5 kg (23.15 lb)

BOOSTER with PRINT CATCHER for the *Kodak Moments* M1 ORDER STATION

Size and Weight - Packed

Height	Width	Depth	Weight
16.51 cm (6.50 in.)	31.12 cm (12.25 in.)	46.36 (18.25in.)	4.0 kg (8.8 lb)

Size and Weight - Unpacked

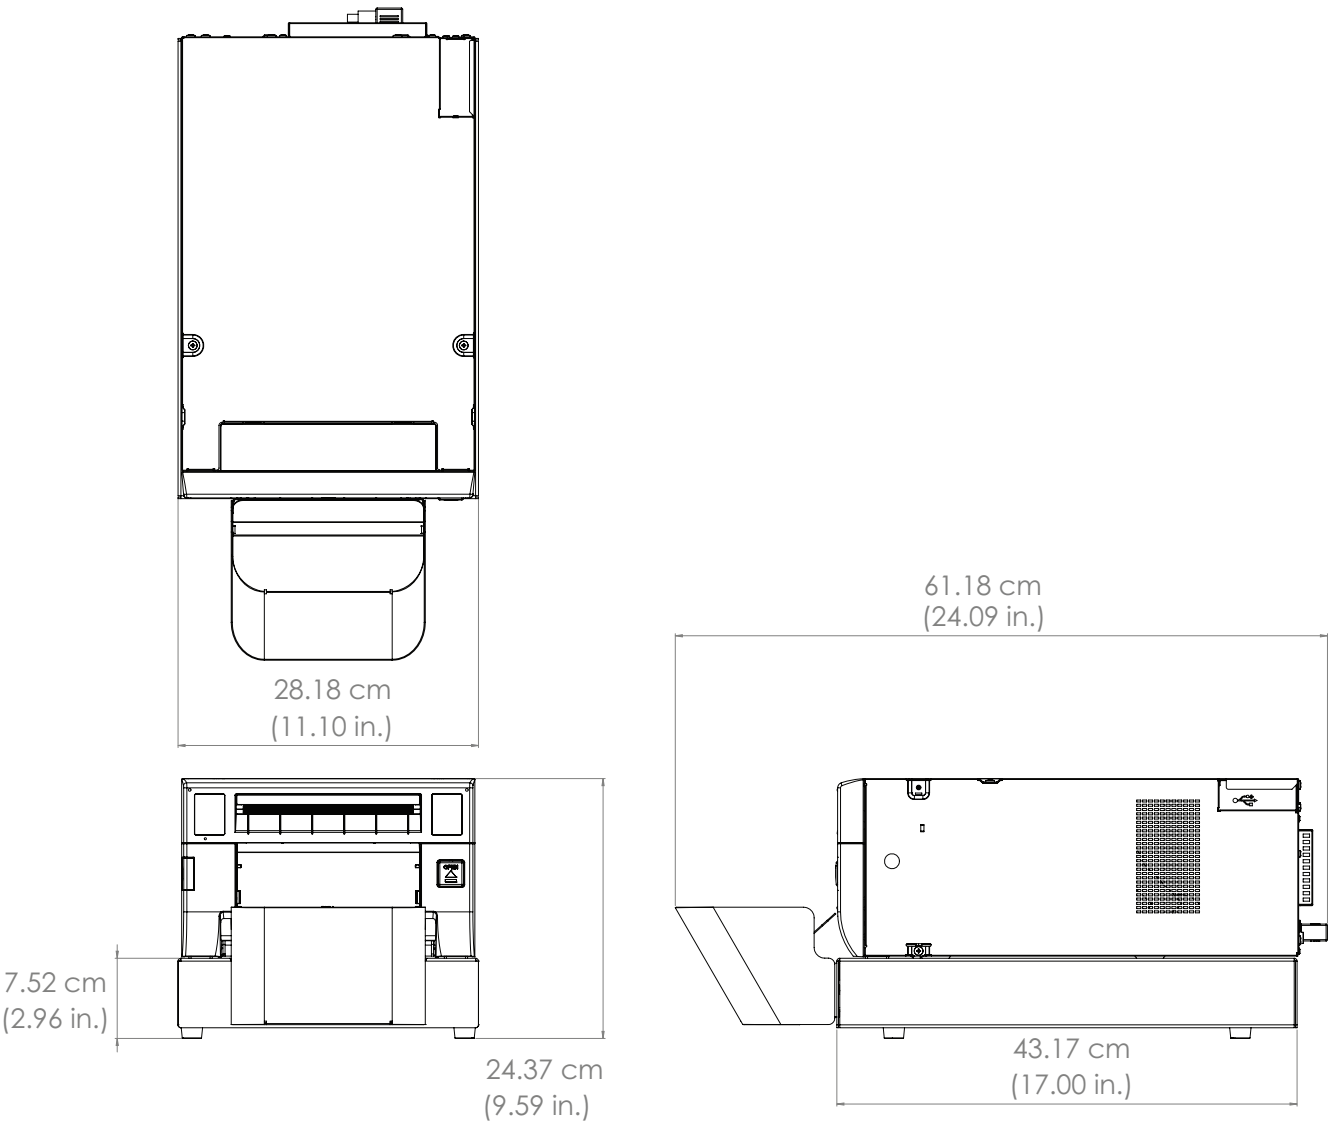

Height of BOOSTER	Height of BOOSTER with PRINTER	Width	Depth of BOOSTER	Depth of BOOSTER with PRINT CATCHER	Weight
7.52 cm (2.96 in.)	24.37 cm (9.59 in.)	28.18 cm (11.10 in.)	43.17 cm (17.00 in.)	61.18 cm (24.09 in.)	3.5 kg (7.7 lb)


305 PRINTER COUNTERTOP ENCLOSURE for the *Kodak Moments M1*

ORDER STATION

Size and Weight - Packed

Height	Width	Depth	Weight
31.75 cm (12.50 in.)	38.74 cm (15.25 in.)	66.68 (26.25 in.)	9.84 kg (21.7 lb)

Size and Weight - Unpacked

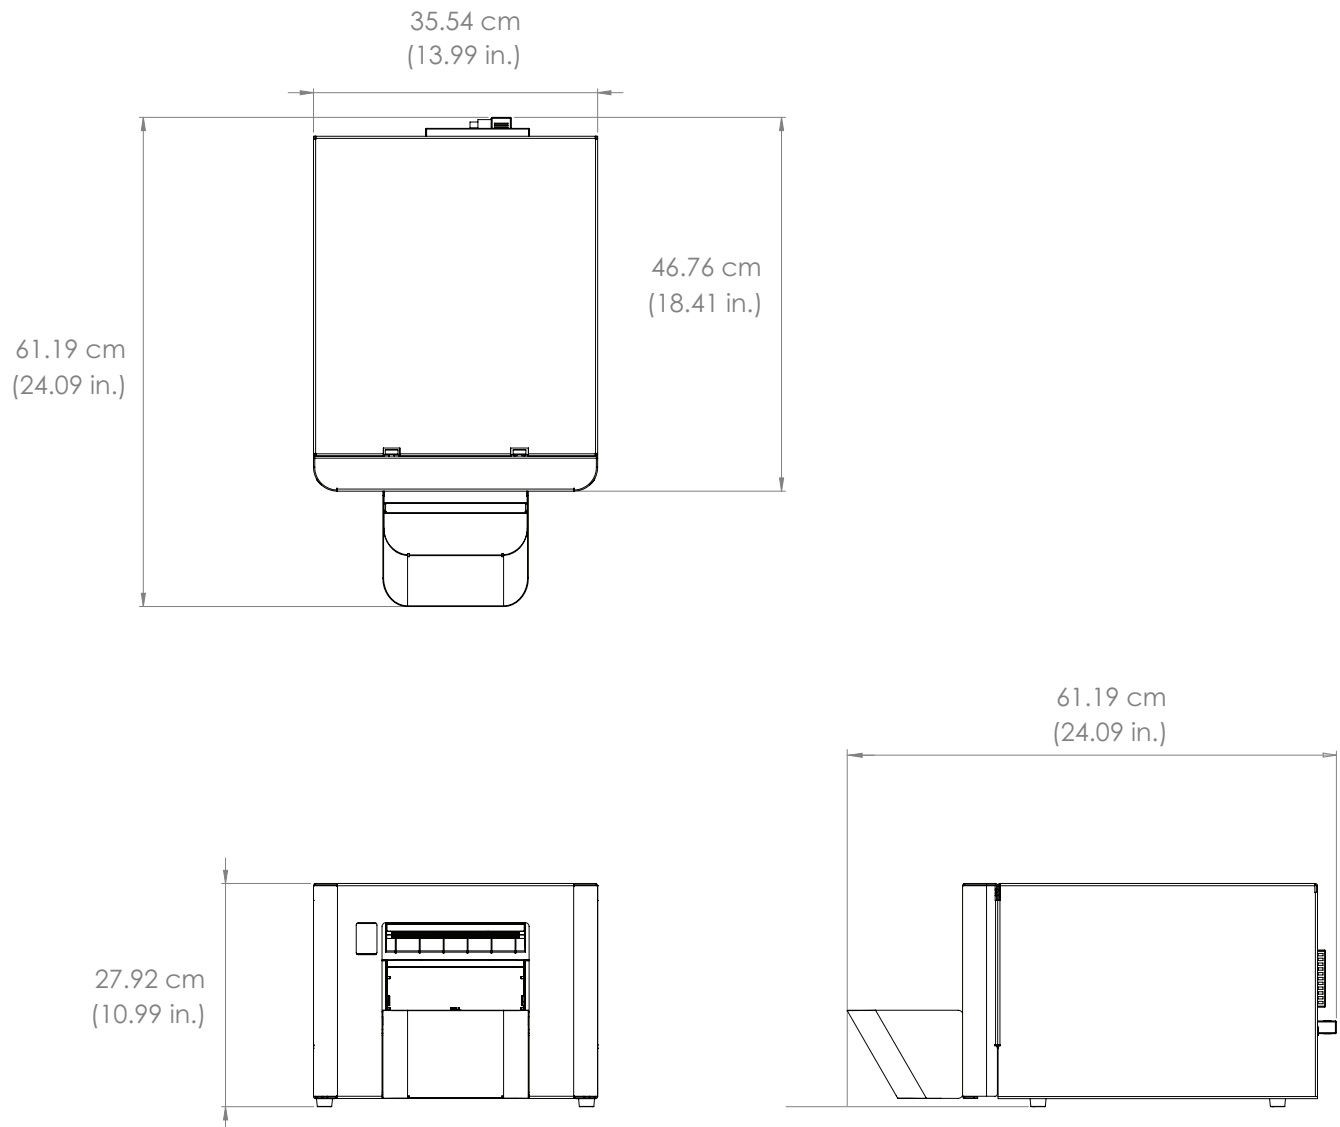




Height	Width	Depth	Depth with PRINT CATCHER	Weight
27.92 cm (10.99 in.)	35.54 cm (13.99 in.)	46.76 cm (18.41 in.)	61.19 cm (24.09 in.)	8.85 kg (19.5 lb)

305 PRINT STATION CABINET for the *Kodak Moments* M1 ORDER STATION

Size and Weight - Packed

Height	Width	Depth	Weight
101.12 cm (39.81 in.)	77.32 cm (30.44 in.)	51.49 (20.27 in.)	46.27 kg (102 lb)

Size and Weight - Unpacked

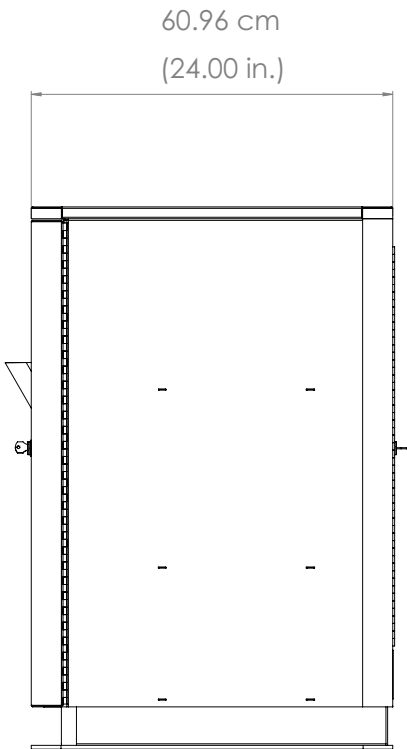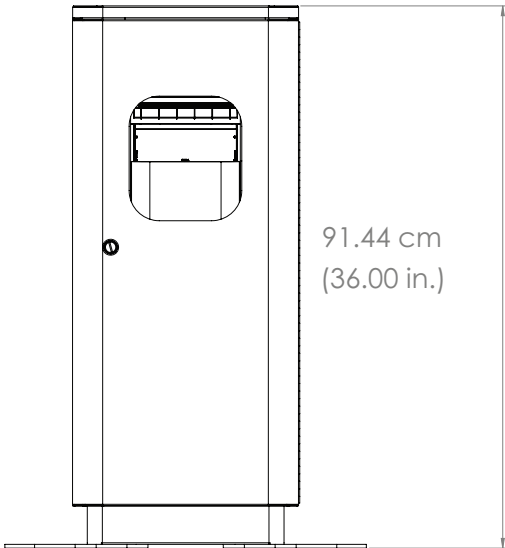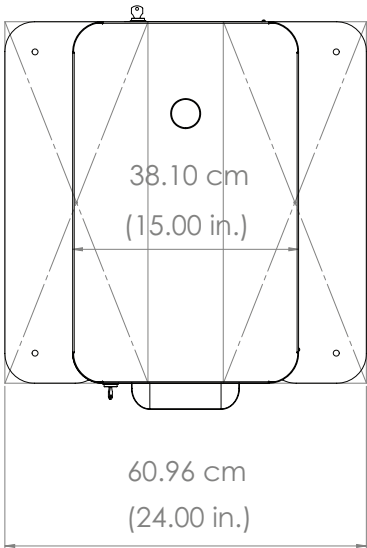

Height	Width	Width including BASE	Depth	Weight
91.44 cm (36.00 in.)	38.10 cm (15.00 in.)	60.96 cm (24.00 in.)	60.96 cm (24.00 in.)	38.56 kg (85 lb)

Section 2: Site Specifications

Power Requirements



Caution

- Do not connect the MERCHANDISER to a circuit with other equipment that might cause electrical interference.
- The power connection must comply with local codes.

Voltage:	100 - 200 V AC
Hz / Cycles:	50-60 Hz
Maximum Power:	2.0 A
POWER OUTLET:	United States & Canada: NEMA 5-15R, simplex
Distance from the POWER OUTLET to the MERCHANDISER:	less than 1.83 m (6.00 ft)

Environment Requirements



Caution

Do not place the *Kodak Moments* M1 ORDER STATION in direct sunlight.

Temperature:	15 - 30°C (59 - 86°F)
Relative Humidity:	15 - 76%
Altitude:	2000 m (6561 ft) maximum
Sound Level:	less than 60 dB
Air flow:	1.5 m ³ / min

Cable Requirements

Component	Length
<i>Kodak Moments</i> M1 ORDER STATION	POWER CORD: less than 3 m (10 ft)
<i>Kodak</i> PHOTO PRINTERS	DATA CABLE: USB 2.0, less than 1 m (3.28 ft) POWER CORD: less than 2 m (6.56 ft)

Network Requirements

Wired Connection

**Important**

The *Kodak Moments* M1 ORDER STATION must have a unique IP address when it is connected to a network (either DHCP or Static - provided by the retailer).

Network Connection: Minimum of 10/100 MB/s LAN speed

Connection through a LAN:

- 1 Cat6 ETHERNET CABLE with RJ-45 connector
- 100 m (328.1 ft) maximum length

Wireless Connection

Channel: Wi-Fi is configured to automatically select the channel with the least congestion in the 2.4 GHz band. Channel 36 is selected for the 5GHz band.

Wireless Network Mode: 802.11 b/g/n on 2.4GHz band. 802.11 a/n on 5GHz band

Channel Bandwidth: 20/40Mhz

4G Cellular Modem

A cellular service plan is required and is provided by *Kodak Alaris*.

Smart Phone Express Requirements

- Allow outbound traffic to ports:
 - HTTP (80)
 - HTTPS (443)
 - DNS (53)
 - TCP/UDP ports 8888 and 9987
 - Telnet (23)
- Customer provided static IP address
- Temporary DNS Server: 23.96.106.37 (This IP must be permitted through the customer firewall)
- URL: kodakprintplace.com (IP: 54.169.105.252). This URL/IP address must be permitted through the customer firewall.
- Refer to “Network Site Specifications for the KODAK Picture Kiosk and the KODAK Adaptive Picture Exchange (4J8169)” to determine what IP addresses are permitted through the DNS server.

Upload / Download Requirements

Minimum speed for download: 256 kbps

Minimum speed for upload: 128 kbps

Recommended speed for both upload and download: at least 1 Mbps

Note: Best customer experience results from a minimum of 3 Mbps.


Other services running on the merchandiser also impact speed requirements:

- RBM—requires a minimum of 128 kbps for upload and download speeds, with 1 Mbps recommended.
- Net-to-Retail—requires a minimum of 128 kbps for upload and 256 kbps for download, with 1 Mbps recommended.
- Social Networking—requires a minimum of 128 kbps for upload and 256 kbps for download, with 1 Mbps recommended.


When running all of these services, a speed of at least 3Mbps reduces customer impact.

Space Requirements

Kodak Moments M1 ORDER STATION

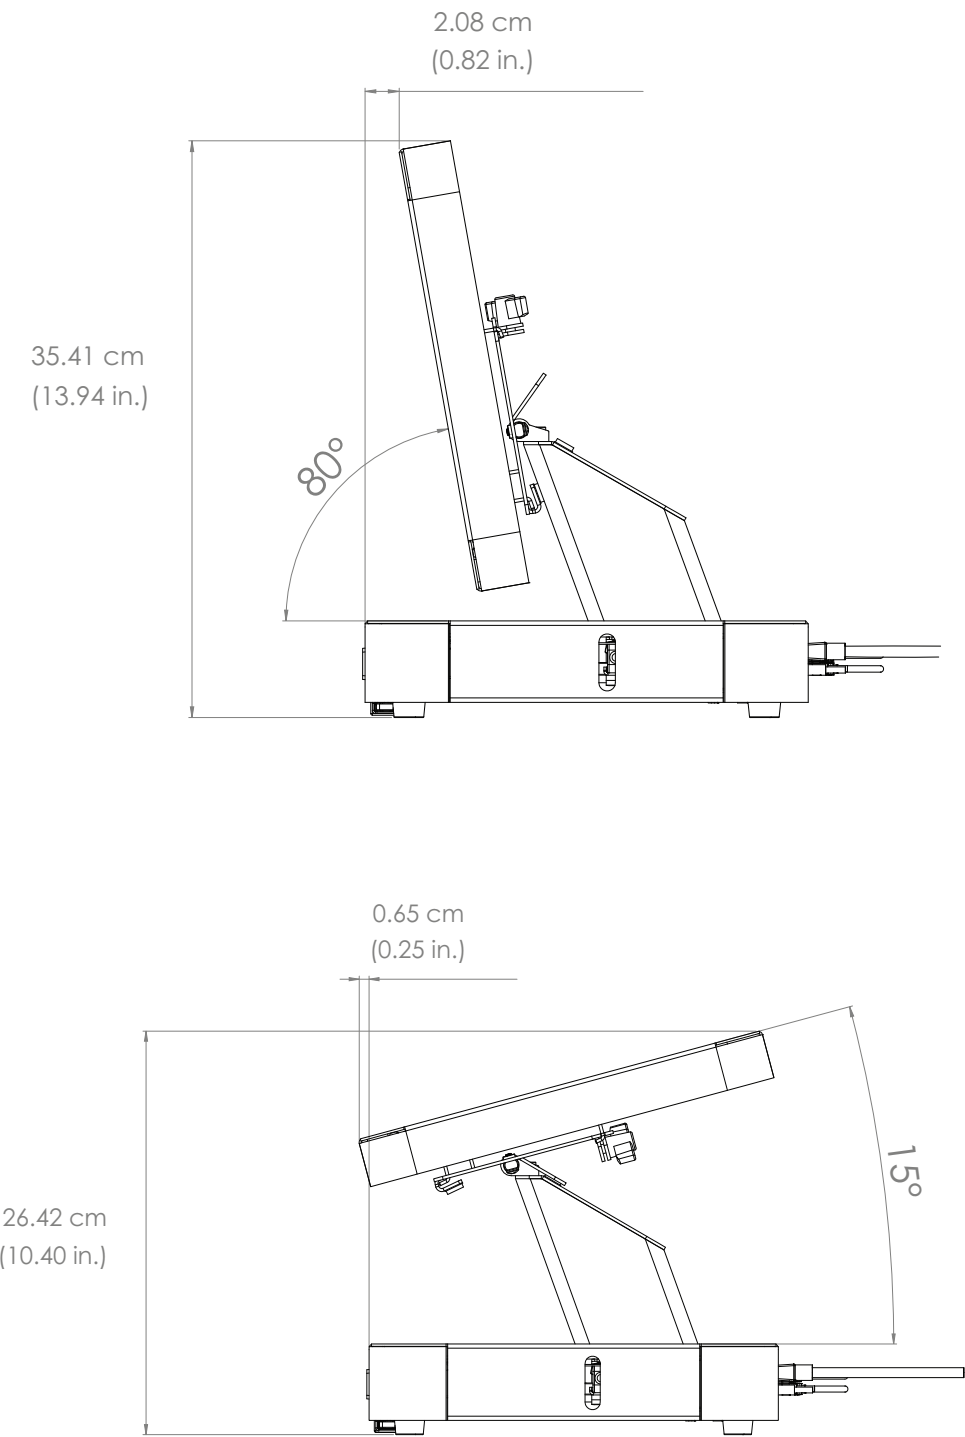


Left	Right	Front	Back
0 cm (0.00 in.)	7.62 cm (3 in.)	0.0 cm (0.00 in.)	7.62 cm (3 in.)

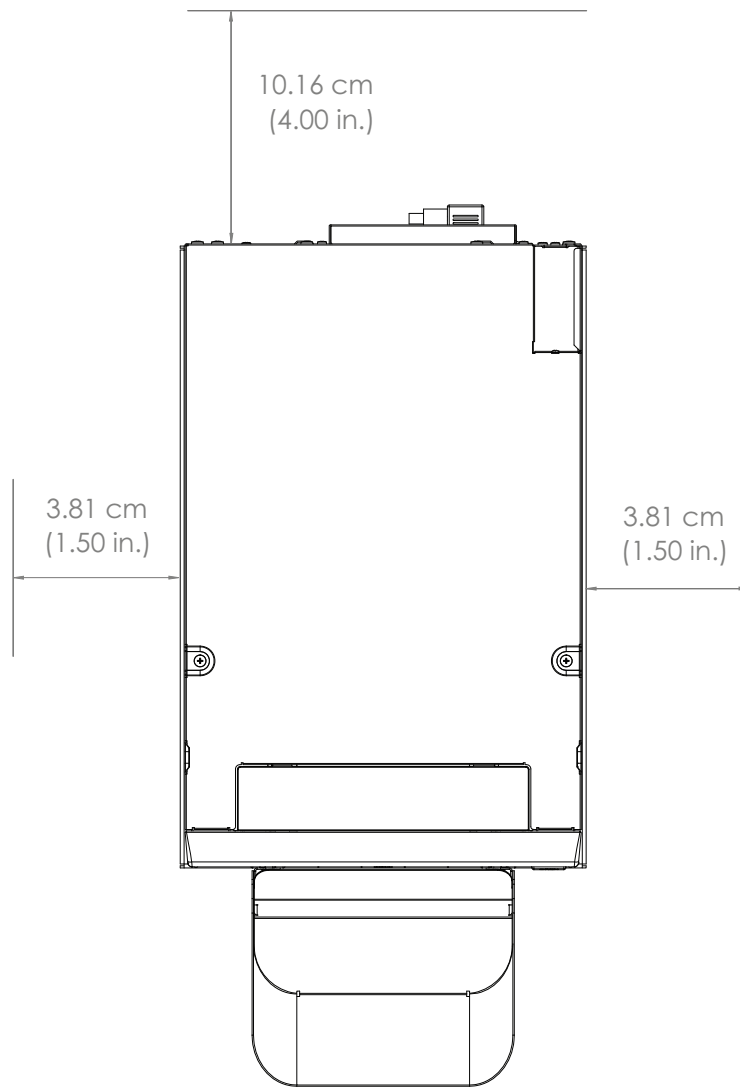
BOOSTER with PRINT CATCHER for the *Kodak Moments* M1 ORDER STATION

Left	Right	Front	Back
3.81 cm (1.50 in.)	3.81 cm (1.50 in.)	0.0 cm (0.0 in.)	10.16 cm (4.0 in.)

Behind the Counter CABINET for the *Kodak Moments M1* ORDER STATION

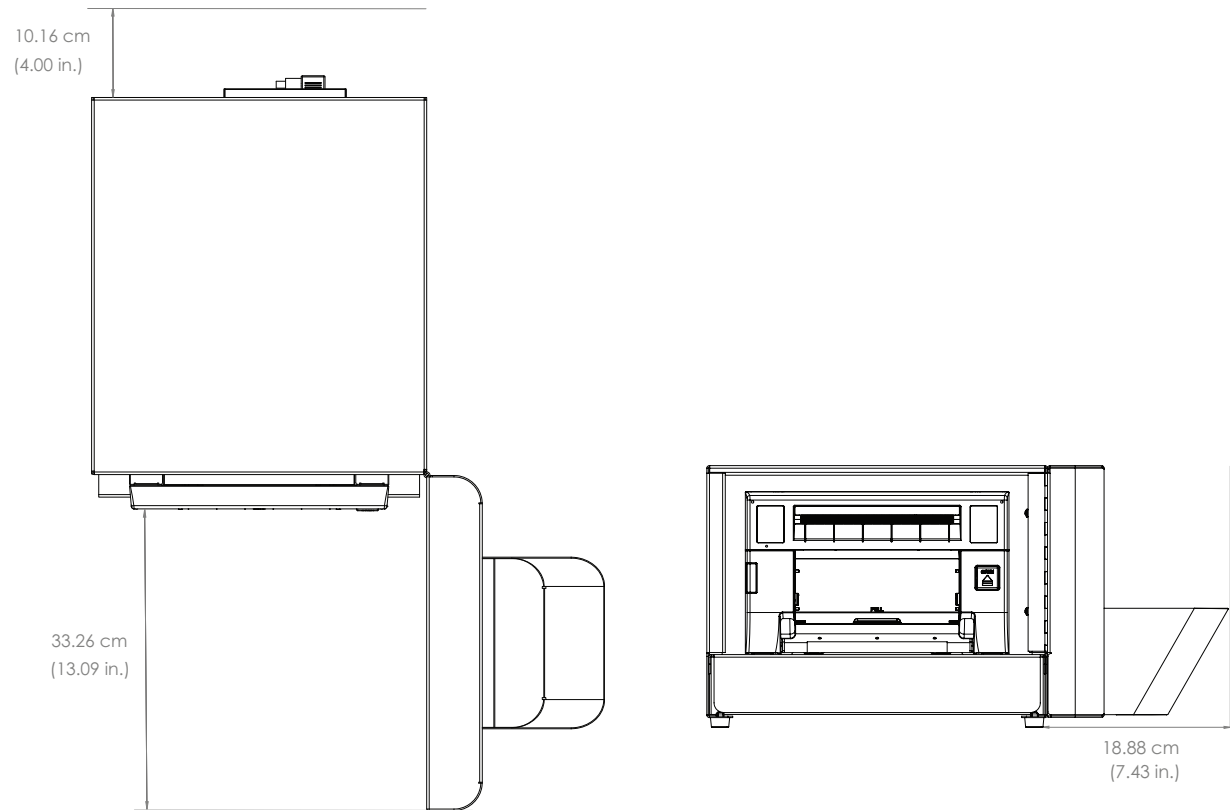

Left	Right	Front	Back
0.0 cm (0.0 in.)	18.88 cm (7.43 in.)	33.26 cm (13.09 in.)	10.16 cm (4.0 in.)

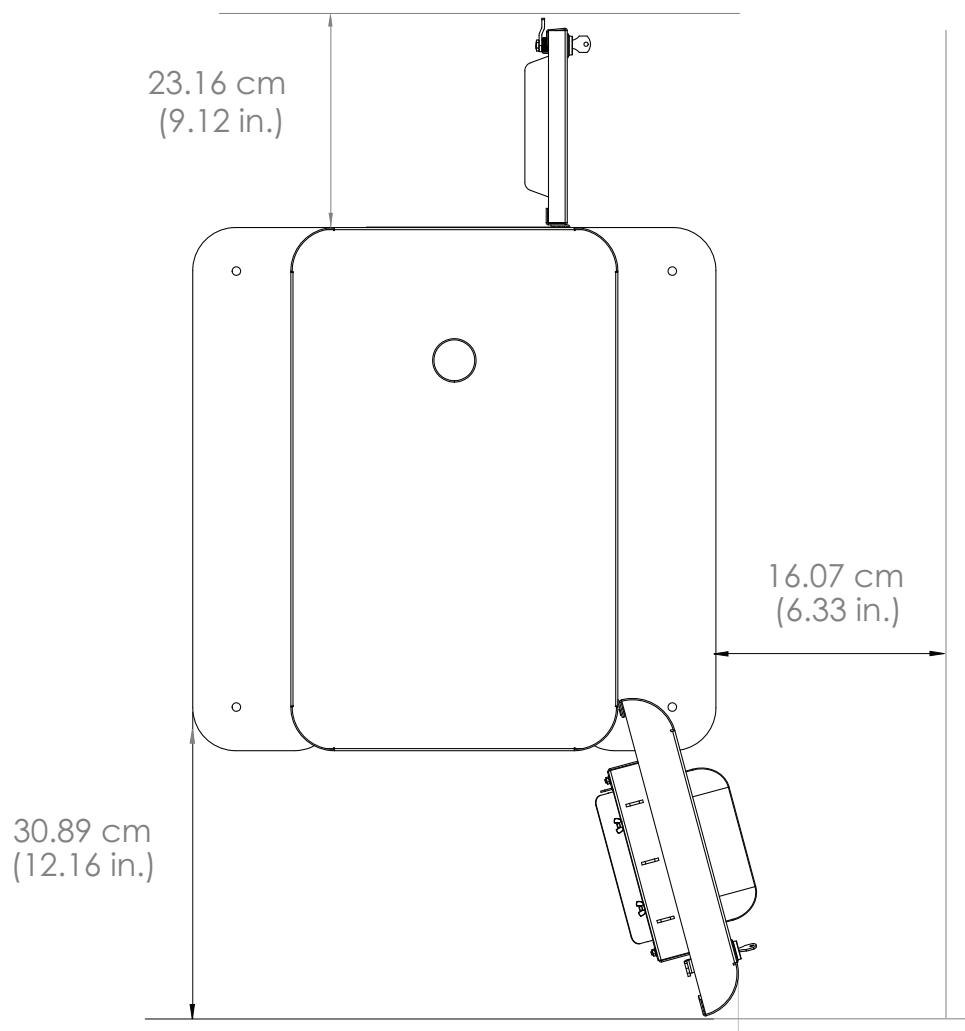CABINET for the *Kodak Moments* M1 ORDER STATION

Left	Right	Front	Back
0 cm (0.00 in.)	16.07 cm (6.33 in.)	30.89 cm (12.16 in.)	23.16 cm (9.12 in.)